



Bearing Isolator for Flooded and Oil Mist Applications

Non-Flanged

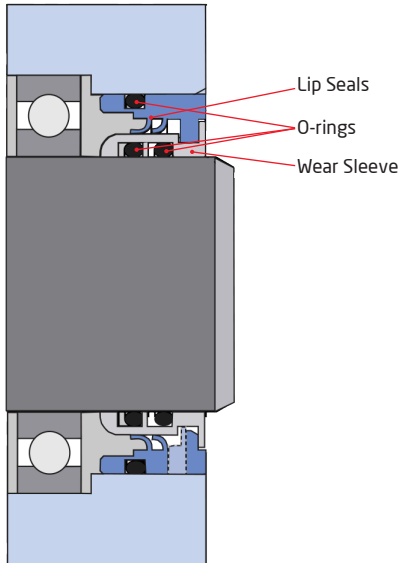



Flanged

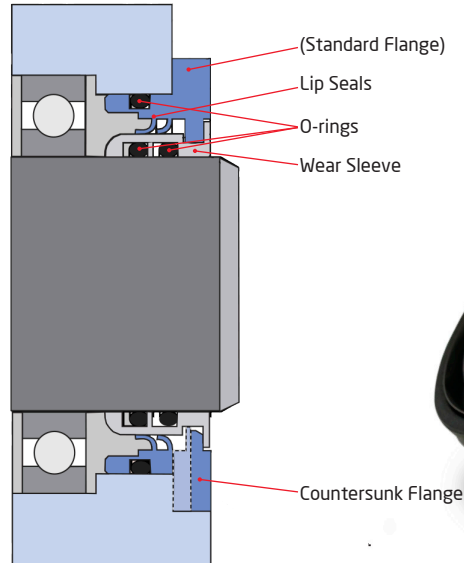

Protect your **rotating equipment** from contaminants. For use with flooded and oil mist lubrication. Please contact Huhnseal for more information.

	Imperial size	Metric size
Maximum Speed	82 ft/second	25 m/second
Maximum Pressure	6 psig	0.4 bar
Size Range (standard)*	up to 4"	up to 100mm
Axial Movement	0.003"	0.08mm
Eccentricity	0.003"	0.08mm
Operating Temperature	-40 to 250 F°	-40 to 121 C°

Materials of Construction: 316ss, Proprietary PTFE, FKM (additional oring materials are available)
**larger sizes available*

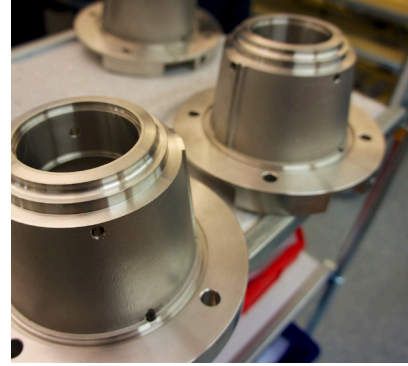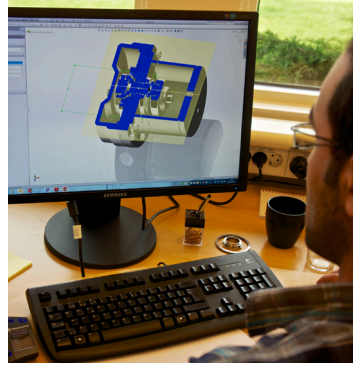

HUHNSEAL

Custom Technology Partner

HUHNSEAL AB

Visiting Address

Järgatan 1 - 261 44 Landskrona - Sweden

Delivery address:

Box 288 - 261 23 Landskrona - Sweden

Tel: +46 418 44 99 40 - Fax: +46 418 44 99 69

sales@huhnseal.com

a Company of Meccanotecnica Umbra spa

BIF-Series brochure Rev.1

USA Representative

Allan Ogle

*North America Sales Manager
Huntsville, AL*

allan.ogle@huhnseal.com

mobile: 256.731.0381

phone: 256.723.8702

Mark Patterson

*Regional Sales Manager
St. Louis, MO*

mark.patterson@huhnseal.com

mobile: 636.751.0743

HUHNSEAL USA inc.

9105 Seguin Dr.

Suite F

Pharr, TX 78577

sales.usa@huhnseal.com

join us:

